

BOTERO



Non contractual picture / Photographie non contractuelle.

AAE BOTERO FP



Alain Ellouz
.paris


Type <i>Type</i>	Chandelier <i>Lustre</i>
Environment <i>Environnement</i>	Indoor <i>Intérieur</i>
Material <i>Matériaux</i>	Alabaster and mat black painted steel <i>Albâtre et acier peint en noir mat</i>
Spheres <i>Sphères</i>	BOTERO 36 : 3 x Ø9,4" - 2 x Ø11" - 1 x Ø14,2" BOTERO 50 : 2 x Ø9,4" - 2 x Ø11" - 1 x Ø12,6" - 1 x Ø19,7" <i>BOTERO 36 : 3 x Ø240 mm - 2 x Ø280 mm - 1 x Ø360 mm</i> <i>BOTERO 50 : 2 x Ø240 mm - 2 x Ø280 mm - 1 x Ø320 mm - 1 x Ø500 mm</i>
Suspension system <i>Système de suspension</i>	Metal rods : central Ø1,7" / Other rods Ø1" <i>Tiges métal : centrale Ø43 mm / Autres tiges Ø27 mm</i> Overall drop of the lighting fixture (distance between the ceiling and the lowest part of the fixture) to be specified. Height included in standard price : from 68,5" to 118,1" for BOTERO 36, from 70,9" to 118,1" for BOTERO 50. Additional length to order (Price upon request). <i>Hauteur du luminaire (distance entre l'accroche et le bas du luminaire) à préciser.</i> <i>Hauteur comprise dans le tarif standard : de 1740 mm à 3000 mm pour BOTERO 36, de 1800 mm à 3000 mm pour BOTERO 50. Longueur additionnelle possible (prix sur demande).</i>
Socket <i>Douille</i>	E27
Recommended bulb <i>Ampoule recommandée</i>	Sphere Ø9,4" : LED Bulb E27 2700K - 250 lm - 4W - dimmable intensity Sphere Ø11" and Ø12,6" : LED Bulb E27 2700K - 800 lm - 9W - dimmable intensity Sphere Ø14,2" : LED Bulb E27 2700K - 1050 lm - 10,5W - dimmable intensity Sphere Ø19,7" : LED Bulb E27 2700K - 1520 lm - 14W - dimmable intensity <i>Sphères Ø240 mm : Ampoule LED E27 2700K - 250 lm - 4W - intensité variable</i> <i>Sphères Ø280 mm et Ø320 mm : Ampoule LED E27 2700K - 800 lm - 9W - intensité variable</i> <i>Sphères Ø360 mm : Ampoule LED E27 2700K - 1050lm - 10,5W - intensité variable</i> <i>Sphères Ø500 mm : Ampoule LED E27 2700K - 1520 lm - 14W - intensité variable</i>
Luminous flux <i>Flux lumineux</i>	Source : BOTERO 36 : 3400 lm BOTERO 50 : 4420 lm The alabaster diffuses between 40 and 60% of the light source lumens <i>L'albâtre diffuse entre 40 et 60% des lumens de la source lumineuse</i>
Wattage <i>Wattage</i>	BOTERO 36 : 41 W BOTERO 50 : 50 W
Voltage <i>Voltage</i>	230 V (UE)
Weight <i>Poids</i>	BOTERO 36 : Approx. 10,3 lb / Env. 50 kg BOTERO 50 : Approx. 132,3 lb / Env. 60 kg

BOTERO®
DESIGN BY ATELIER ALAIN ELLOUZ
MADE IN FRANCE


References BOTERO 36 : COL-0027
Références BOTERO 50 : COL-0029

Warranty 2 years warranty. General terms and conditions of sale.
Garantie 2 ans de garantie. Voir conditions générales de vente.

BOTERO 36

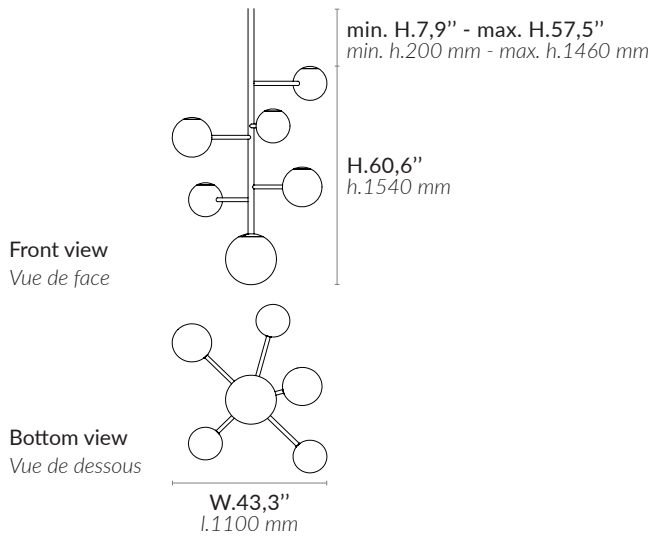


BOTERO 50

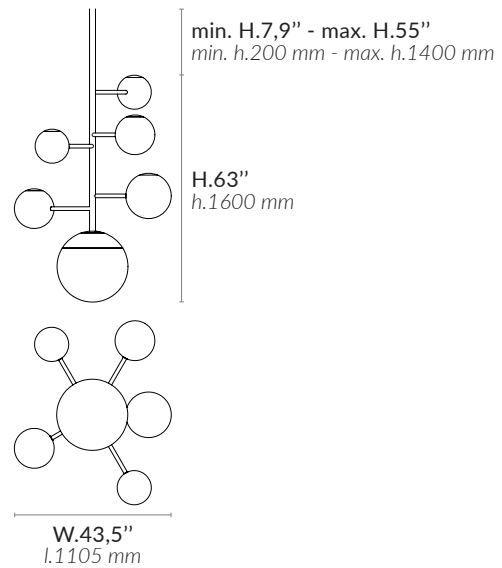

FIXING SYSTEMS AND FINISHES / SYSTÈMES DE FIXATION ET FINITIONS


• VISIBLE CANOPY / PAVILLON VISIBLE

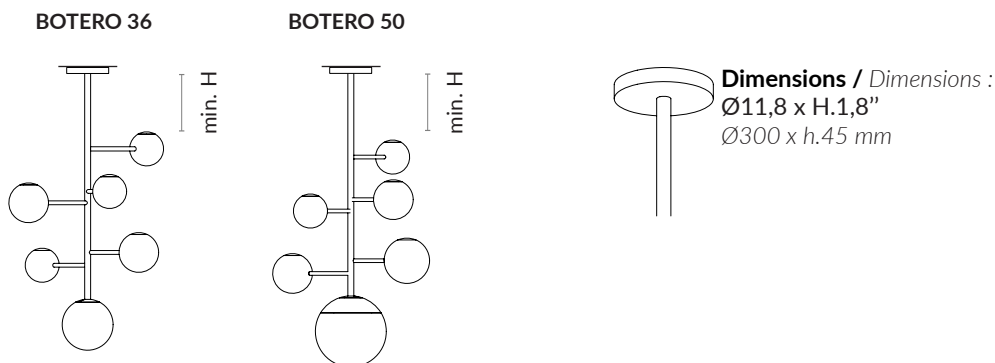

• HIDDEN INDIVIDUAL FIXING / FIXATION INDIVIDUELLE INVISIBLE

Recommendation : The minimal height between mounting support and false ceiling should be 3,9". Total height to be defined according to project.


Recommandation sur la hauteur minimale entre le support d'accroche et le faux plafond : 100 mm. Hauteur totale à définir selon projet.

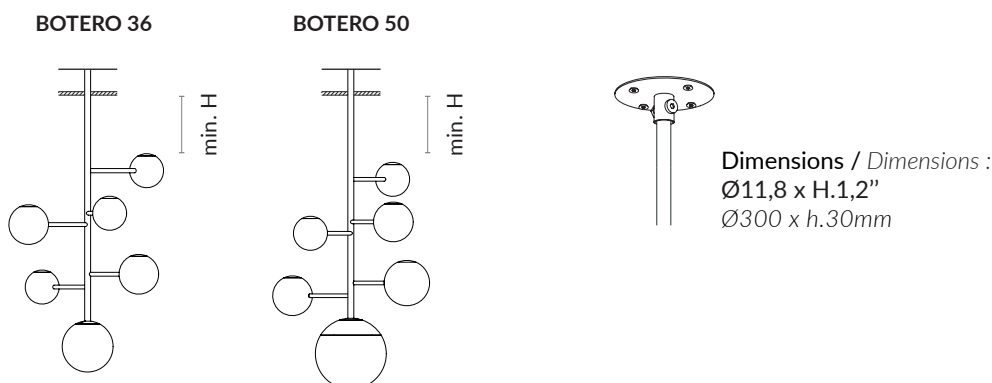

- **FALSE CEILING HOLE FINISHING / FINITION DU TROU DANS LE FAUX PLAFOND**

The hole in the false ceiling can be finished with an eyelet. / *Le trou dans le faux plafond peut être fini par un œillet.*

EYELETS 58 / ŒILLETS 58



Dimensions / Dimensions :

Ø2,28"

Ø58 mm

- **RODS, EYELETS & CANOPY FINISH / FINITION DES TIGES, OEILLET & PAVILLON**

Paint finish / Finition peinture :



Mat black

Noir mat

ref: dcl-022

TECHNICAL INFORMATION

EQUIPPED WITH UL LISTED COMPONENTS


BOTERO

Type	Chandelier Equipped with UL listed components
Environment	Indoor
Material	Alabaster and mat black painted steel
Spheres	BOTERO 36 : 3 x Ø9,4" - 2 x Ø11" - 1 x Ø14,2" BOTERO 50 : 2 x Ø9,4" - 2 x Ø11" - 1 x Ø12,6" - 1 x Ø19,7"
Suspension system	Metal rods: central Ø1,7" / Other rods Ø1" - Additional length to order (Price upon request)
Socket	E26
Recommended bulb	Sphere Ø9,4" and Sphere Ø11" : LED Bulb E26 2700K - 750 lm - 9W - dimmable intensity Sphere Ø12,6" : LED Bulb E26 2700K - 750 lm - 11W - dimmable intensity Sphere Ø14,2" : LED Bulb E26 2700K - 800 lm - 11W - dimmable intensity Sphere Ø19,7" : LED Bulb E26 2700K - 1600 lm - 15,5W - dimmable intensity The alabaster diffuses between 40 and 60% of the light source lumens
Wattage	BOTERO 36 : 41 W BOTERO 50 : 50 W
Voltage	120 V (US)
Reference	BOTERO 36 : COL-0028 BOTERO 50 : COL-0030

Dimensions :

BOTERO 36

BOTERO 50

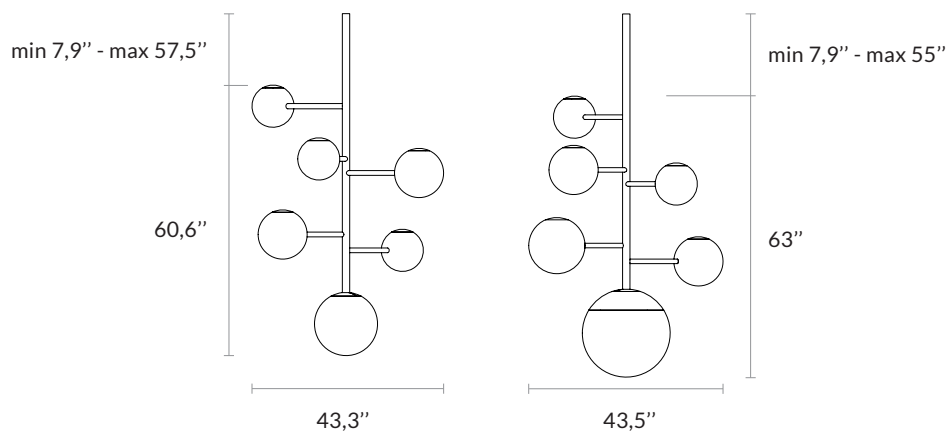

Weight :

110 lb / 50 Kg

132 lb / 60 Kg

FIXING SYSTEM OF YOUR CHOICE

Included in the price of the luminaire

• HIDDEN INDIVIDUAL FIXING


Ø11,8 x h.1,2"

System adapted to false ceilings for an aspect without a visible fixation (the rod comes out directly from the ceiling). The hole in the false ceiling can be finished with an eyelet .

• VISIBLE CANOPY

Ø11,8 x h.1,8"

Individual ceiling fixing.



2 years warranty. General terms and conditions of sales.

www.atelieralainellouz.com, contactusa@atelieralainellouz.com, +1 (212) 381 6172