

ISOUHA



Non contractual picture.

AAE ISOUHA UE FP




Alain Ellouz
.paris


Type Type	Wall light Applique
Environment Environnement	Indoor Intérieur
Material Matériaux	Alabaster and painted steel Albâtre et acier peint
Lighting system Système d'éclairage	LED Strip 9,6 W/m 2700K - Integrated or deported transformer - Phase dimming Bande LED 9,6 W/m 2700K - Transformateur intégré ou déporté - Variation de phase
Voltage Voltage	24V
Wattage Wattage	3,5 W
Luminous flux Flux lumineux	277 lm The alabaster diffuses between 40 and 60% of the light source lumens L'albâtre diffuse entre 40 et 60% des lumens de la source lumineuse
Weight Poids	6,6 lb / 3 kg

Dimensions :

Top view




Front view



90

Side view

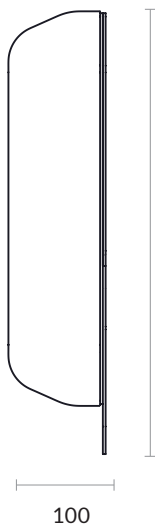

490

100

ISOUHA®
DESIGN BY ATELIER ALAIN ELLOUZ
MADE IN FRANCE

References PR004047

Warranty 2 years warranty. General terms and conditions of sale.
Garantie

www.atelieralainellouz.com, contactusa@atelieralainellouz.com, +1 (212) 381 6172

LIGHTING CONTROL SYSTEM / SYSTÈME DE CONTRÔLE D'ÉCLAIRAGE

FOR DEPORTED TRANSFORMER / POUR TRANSFORMATEUR DÉPORTÉ

To be chosen according to project : DMX, DALI (DT8), TRIAC (phase dimming, setting knobs to choose the light temperature), 1-10V (two 1-10V bus required), NONE (setting knob to choose and fix the light intensity and temperature).

À choisir selon le projet : DMX, DALI (DT8), TRIAC (variation sur phase, boutons de réglage pour choisir la température de la lumière), 1-10V (deux 1-10V bus requis), AUCUN (bouton de réglage pour choisir et fixer l'intensité lumineuse et la température de couleur).

For a correct functioning the remote transformer / driver must be placed in an accessible place at maximum 33' / 10 m from the light fixture.

Pour un fonctionnement optimisé, le transformateur / driver déporté doit être placé dans un espace accessible à moins de 10 m de câbles du luminaire.

TECHNICAL INFORMATION EQUIPPED WITH UL LISTED COMPONENTS


Type	Wall light Equipped with UL listed components
Environment	Indoor
Material	Alabaster and painted steel
Lighting system	LED Strip 2,9W/ft (2700K or 3000K) - Integrated or deported transformer - Phase dimming
Voltage	24V
Wattage	3,5 W
Source lumens	233 lm The alabaster diffuses between 40 and 60% of the light source lumens
Weight	6,6 lb

Dimensions :

Top view




Front view



3 9/16"

Side view



3 15/16"

1-7 5/16"

ISOUHA®
DESIGN BY ATELIER ALAIN ELLOUZ
MADE IN FRANCE

References PR005208

Warranty 2 years warranty. General terms and conditions of sale.

www.atelieralainellouz.com, contactusa@atelieralainellouz.com, +1 (212) 381 6172

LIGHTING CONTROL SYSTEM FOR DEPORTED TRANSFORMER

To be chosen according to project : DMX, DALI (DT8), TRIAC (phase dimming, setting knobs to choose the light temperature), 1-10V (two 1-10V bus required), NONE (setting knob to choose and fix the light intensity and temperature).

For a correct functioning the remote transformer / driver must be placed in an accessible place at maximum 33' from the light fixture.